

Peel & Stick®



With the added benefit of Clean Edge Technology®, you have the best of both worlds—pressure sensitive adhesive without sticky edges. Bedford Peel & Stick® closures add value to your products, because they are a reclosable feature consumers love!

### Features:

- Exclusive Clean Edge Technology®—pressure sensitive bag reclosure with adhesive-free edges
- Easy to apply by hand or machine
- Plastic or metallic ties
- Wide range of lengths & colors
- Special color matches & custom printing




1659 Rowe Ave | PO Box 39 • Worthington, MN 56187-0039  
Ph: 1-507-376-4136 | Fax: 1-507-376-6742  
Toll Free US/Canada: 1-877-BEDFORD (233-3673)

[www.bedford.com](http://www.bedford.com)  
[www.elastitag.com](http://www.elastitag.com)  
[bedford@bedford.com](mailto:bedford@bedford.com)



# PEEL & STICK® APPLIER

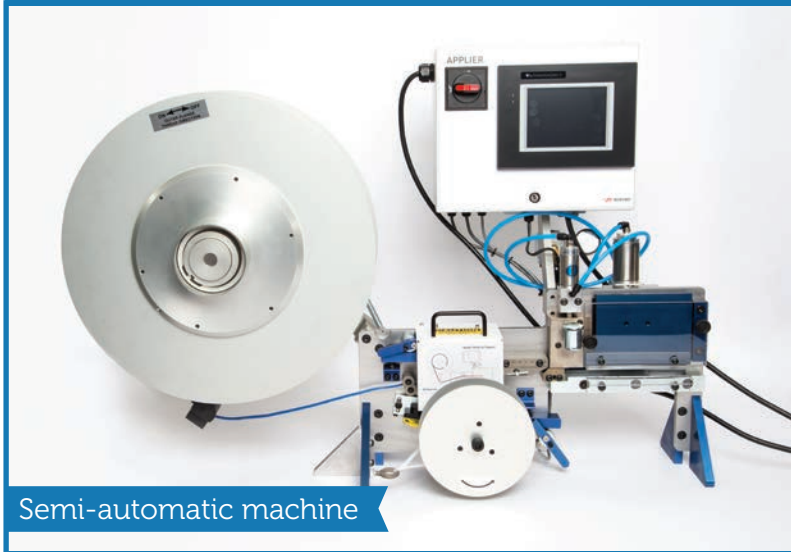

Semi-automatic machine



## Features:

- ▶ Saves time and labor
- ▶ No hot melt adhesive required
- ▶ Fast application (up to 30 bags/minute)
- ▶ Adjustable settings
- ▶ Foot activated
- ▶ Release liner is spooled separately for easy disposal
- ▶ Improved PLC interface making set up & operation easier

## Bedford Peel & Stick® Spools:

- ▶ Exclusive Clean Edge Technology® — pressure sensitive adhesive
- ▶ One tie length with adhesive per spool
- ▶ Spool wound with release liner to the outside
- ▶ Plastic or metallic tie in a variety of colors
- ▶ Tie can be applied to paper, plastic, or PET bags
- ▶ .315 inch (8 mm) width — Double Wire Tin-Tie®
- ▶ 1500 foot spool (457 Meters) — 10 inch diameter (25.4 cm)
- ▶ 3000 foot spool (914 Meters) — 14 inch diameter (35.6 cm)

## Model 52B Machine Specifications:

- ▶ Weight: 88 lbs (40 kg), without spool
- ▶ Machine dimensions:  
25.5 inches (H) x 37.5 inches (W) x 13.5 inches (D)  
(64.8 cm x 95.3 cm x 34.3 cm)
- ▶ Electrical: 115vac-60-2amp (optional: 230vac-50/60-2amp)
- ▶ Air requirement: 80 psi (550 kPa)
- ▶ Applies tie lengths from 3.25 inches — 7 inches (8.25 cm — 17.78 cm)